

maier<sup>®</sup> WARRANTY


※ Article	SPORT AUTONIZER	Date of Purchase	DMY
		Period of Guarantee	One year from the date of purchase
※ Customer	Add. & Tel		
	Name		
※ Store	Name of the store & its add.		

- 1) All products of **maier**<sup>®</sup> pass the strict tests prior to leaving factory. Customers could within one year from the date of purchase enjoy free repair or replacement of parts against presentation of this guarantee if it is attested by our company that malfunction or damage to the device and/or parts occurs under normal running condition.
- 2) The guarantee does not cover the damages that are attributable to self dismantling and assembling, unauthorized operation not found in the instruction, random change of power source and/or voltage, artificial causes and natural disaster.
- 3) Date (s) on this guarantee and the purchase invoice is the evidence of one year free maintenance

DISTRIBUTED BY:

## SPORT AUTONIZER CAR AIR PURIFIER

# INSTRUCTIONS

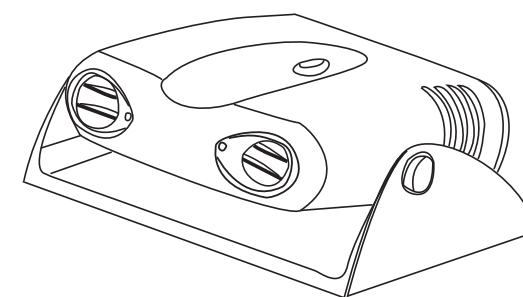

Thank you for purchasing this high-quality product with one-Year repair guaranteed. Your satisfaction means everything to us and continuous service to you is our pursuit.

### Special features

- Utilizing ionic breeze technique in producing negative ion and active oxygen to eliminate unpleasant odors, cigarettes smoke airborne pollutants and allergens, the air purifier makes the air in your vehicle clean and fresh.
- Without motor or fan, it circulates clean air silently to make your driving comfortable and refreshing.

### How to operate

- Open the battery cover at the back of the purifier (see figure 1), 4 AA alkaline batteries and replace cover.
- This purifier used 12V direct current or battery .To operate ,simply plug into the cigarettes lighter socket.
- Align the protruded part on both sides of the purifier with two holes at the side of support base and press down to assemble together the purifier and support base (see figure 2). Excess cable can be winded neatly around the grills at the support base.
- Remove the layer of paper on adhesive material under the support base to secure the purifier to the dashboard ,or using a support with suction cup to secure it to the windshield (see figure 3).
- Make sure the purifier is secure at a suitable position that dose not impair your visibility.
- Press the power button to operate or to stop the purifier (see figure 2). Green indicator light indicates the purifier is operating. Blinking green light indicates low battery power.

### Operation (3-step mode)

- Press POWER button once, the unit starts working and green indicators are lit. The unit produces negative ions and ozone at this time.
- Press POWER button twice, the unit stops emitting negative ions and ozone. Red LEDs are lit and alternating to simulate car alarm to ward off intruders. This function needs only low electric power and batteries inside the unit can run up to several weeks under this status.
- Press POWER button third time, the unit stops all its functions.

### Caution

- Please load the batteries if you want to put the simulated car alarm function (alternating red LEDs) in effect.
- When green indicator is twinkling under the battery operation, it means the batteries are almost exhausted. Please replace the batteries accordingly.
- It is recommended to use high quality alkaline batteries in this unit. When the unit is not operated for long time, please take out the batteries to prevent from battery leakage in the compartment.

### Cleaning and maintenance

- After about 3 months of operation, front cover should be opened and cleaned.
- Press the protruded part on the side of the purifier inward to remove it from base support (see figure 4). Press the lock key at the back at the same time slide inward to open the top part of the purifier (see figure 1).
- Use a cotton bud to wipe lean the metal dust collecting ring and terminal pin (see figure 5).

### Applicable area

- For use in cars and sedans.

### After sales service

- When malfunction occurs, contact your distributor.

### Specifications

Model	Rated voltage	Power consumption	Output of negative ions	Active oxygen concentration	Dimension	Weight
XJ-301	DC 12V	2W 4AA	≥1×10 <sup>9</sup> /cm <sup>3</sup>	≤0.04ppm	120X100X50 (MM)	175g

### Function Indication Figure

